

## SunPower X-Series: X22-370

# SunPower® Residential DC Panel

SunPower X-Series panels combine the top efficiency, durability and warranty available in the market today, resulting in more long-term energy and savings.<sup>1,2</sup>



### Maximum Power. Minimalist Design.


Industry-leading efficiency means more power and savings per available space. With fewer panels required, less is truly more.



### Highest Lifetime Energy and Savings

Designed to deliver 60% more energy in the same space over 25 years in real-world conditions like partial shade and high temperatures.<sup>2</sup>

## Fundamentally Different. And Better.




### The SunPower Maxeon® Solar Cell

- Enables highest efficiency panels available<sup>2</sup>
- Delivers leading reliability<sup>3</sup>
- Patented solid metal foundation prevents breakage and corrosion




### As Sustainable As Its Energy

- Ranked #1 in Silicon Valley Toxics Coalition 2015 Solar Scorecard<sup>4</sup>
- First solar panels to achieve Cradle to Cradle Certified™ Bronze recognition<sup>5</sup>
- Contributes to more LEED categories than conventional panels<sup>6</sup>

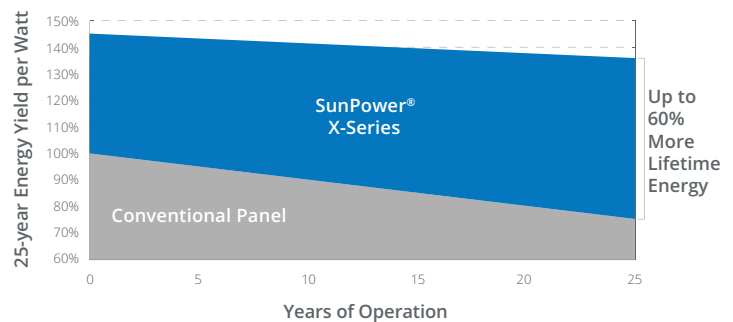

### Best Reliability, Best Warranty

With more than 25 million panels deployed around the world, SunPower technology is proven to last. That's why we stand behind our panel with the industry's best 25-year Combined Power and Product Warranty, including the highest Power Warranty in solar.

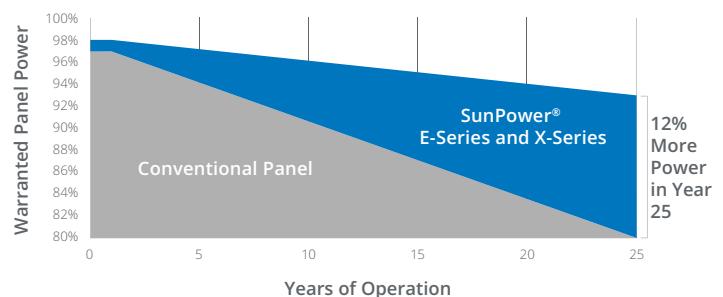


## X-Series: X22-370 SunPower® Residential DC Panel


Electrical Data	
	SPR-X22-370
Nominal Power (P <sub>nom</sub> ) <sup>7</sup>	370 W
Power Tolerance	+5/0%
Panel Efficiency	22.7%
Rated Voltage (V <sub>mpp</sub> )	59.1 V
Rated Current (I <sub>mp</sub> )	6.26 A
Open-Circuit Voltage (V <sub>oc</sub> )	69.5 V
Short-Circuit Current (I <sub>sc</sub> )	6.66 A
Max. System Voltage	1000 V UL & 1000 V IEC
Maximum Series Fuse	15 A
Power Temp Coef.	-0.29% / °C
Voltage Temp Coef.	-167.4 mV / °C
Current Temp Coef.	2.9 mA / °C

Tests And Certifications	
Standard Tests <sup>8</sup>	UL1703 (Type 2 Fire Rating), IEC 61215, IEC 61730
Quality Management Certs	ISO 9001:2015, ISO 14001:2015
EHS Compliance	RoHS, OHSAS 18001:2007, lead free, Recycle Scheme, REACH SVHC-163
Sustainability	Cradle to Cradle Certified™ Bronze. "Declare." listed.
Ammonia Test	IEC 62716
Desert Test	MIL-STD-810G
Salt Spray Test	IEC 61701 (maximum severity)
PID Test	1000 V: IEC 62804, PVEL 600 hr duration
Available Listings	UL, TUV, MCS, FSEC, CEC

Operating Condition And Mechanical Data	
Temperature	-40° F to +185° F (-40° C to +85° C)
Impact Resistance	1 inch (25 mm) diameter hail at 52 mph (23 m/s)
Appearance	Class A+
Solar Cells	96 Monocrystalline Maxeon Gen III
Tempered Glass	High-transmission tempered anti-reflective
Junction Box	IP-65, TE (PV4S)
Weight	41 lbs (18.6 kg)
Max. Test Load <sup>9</sup>	Wind: 154 psf, 7400 Pa, 754 kg/m <sup>2</sup> back Snow: 208 psf, 10000 Pa, 1019 kg/m <sup>2</sup> front
Design Load	Wind: 62 psf, 3000 Pa, 305 kg/m <sup>2</sup> back Snow: 125 psf, 6000 Pa, 611 kg/m <sup>2</sup> front
Frame	Class 1 black anodized (highest AAMA rating)

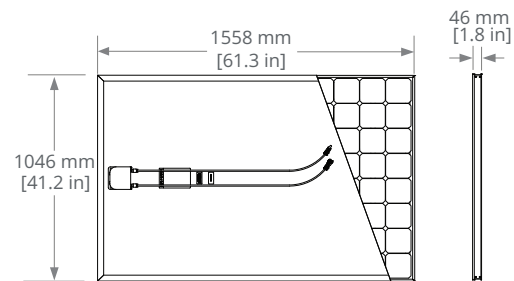

FRAME PROFILE



(A) Cable Length: 1000 mm +/-10 mm

1 SunPower 360 W compared to a Conventional Panel on same-sized arrays (260 W, 16% efficient, approx. 1.6 m<sup>2</sup>), 4% more energy per watt (based on PVSyst pan files), 0.75%/yr slower degradation (Campeau, Z. et al. "SunPower Module Degradation Rate," SunPower white paper, 2013).

2 Based on search of datasheet values from websites of top 10 manufacturers per IHS, as of May 2019.

3 Jordan, et. al. Robust PV Degradation Methodology and Application. PVSC 2018.

4 SunPower is rated #1 on Silicon Valley Toxics Coalition's Solar Scorecard.

5 Cradle to Cradle Certified is a multi-attribute certification program that assesses products and materials for safety to human and environmental health, design for future use cycles, and sustainable manufacturing.

6 X-Series and E-Series panels additionally contribute to LEED Materials and Resources credit categories.

7 Standard Test Conditions (1000 W/m<sup>2</sup> irradiance, AM 1.5, 25° C). NREL calibration Standard: SOMS current, LACCS FF and Voltage.

8 Type 2 fire rating per UL1703:2013, Class C fire rating per UL1703:2002.

9 Please read the safety and installation guide for more information regarding load ratings and mounting configurations.

See [www.sunpower.com/company](http://www.sunpower.com/company) for more reference information.

For more details, see extended datasheet: [www.sunpower.com/solar-resources](http://www.sunpower.com/solar-resources). Specifications included in this datasheet are subject to change without notice.

©2020 SunPower Corporation. All rights reserved. SUNPOWER, the SUNPOWER logo, MAXEON and InvisiMount are registered trademarks in the EU, the US and other countries as well. Cradle to Cradle Certified™ is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.

1-800-SUNPOWER

[sunpower.com](http://sunpower.com)

SUNPOWER®



527787 Rev C / LTR\_US

Publication Date: June 2020